

Plastic Prep System

SU4901 SUA4903

Low VOC Markets

SU4901 Clean and Scuff Sponge

SUA4903 Advanced Plastic Bond (Aerosol)

ONECHOICE® Plastic Prep System is designed to simplify the plastic refinish preparation process and deliver superior adhesion to all common automotive plastic substrates.



Features & Benefits

- Convenient ready-to-apply packaging
- Fast application and dry times
- Can be used on all common automotive plastic substrates
- Significantly reduces the potential for warranty repairs
- Simple, easy-to-use process
- Shorter refinish cycle time
- Superior adhesion

Compatible Products

- ENVIROBASE® High Performance Waterborne Basecoat
- *Envirobase* High Performance Undercoats

Note: When applying PPG topcoats and undercoats over plastic substrates, please refer to the products' specific technical bulletin for proper application

May be used with all common primed and unprimed automotive plastic substrates.

Directions for Use

Process for Pre-Primed Plastic Substrates

Step 1:



Using 400 grit sandpaper (hand sand or D.A. machine sand), abrade the entire surface to be painted.*

Blow off and wipe dry or wipe with a clean cloth. Entire surface must be **totally de-glossed** before moving to the next step.

**Test any pre-primed parts with a solvent first. If the primer is able to be removed with a solvent, remove the primer and follow the procedure for Unprimed Plastic Substrates.*

Step 2:



Using the SU4901 Clean and Scuff Pad

Tear open SU4901 and clean the substrate thoroughly using the scuff pad side of the pre-saturated sponge then rinse with water. Blow dry or wipe with a clean cloth. Make sure surface is thoroughly dry before proceeding.

Step 3:



Final Cleaning Procedure

Final clean with SWX 350 H₂O-SO-CLEAN[®] or SXA103 MULTI-PREP™*. Be sure the surface is thoroughly dry before proceeding and use a tack cloth to eliminate dirt prior to applying SUA4903 to any cut through.

**Before use of SXA103, confirm that this cleaner is compliant with local regulations*

Process for Unprimed Plastic Substrates

Step 1:



Using the SU4901 Clean and Scuff Pad

Tear open the SU4901 and clean the substrate thoroughly using the scuff pad side of the pre-saturated sponge then rinse with clean water. Blow dry or wipe with a clean cloth. Entire surface must be totally de-glossed. Make sure surface is thoroughly dry before proceeding.

Step 2:



Using SXA103/SX103 or SWX350 as a final wipe
Using SXA103/SX103 as an anti-static agent

Final clean with SWX350 or SXA103/SX103*. Be sure the surface is thoroughly dry before proceeding and use a tack cloth to eliminate dirt prior to applying SUA4903.



Using the SXA103/SX103 as an anti-static agent, apply a mist coat of SXA103/SX103 on the surface to be painted both before and after tacking. This will help reduce static electricity on all treated surfaces, minimizing the attraction of dust & dirt.

**Before use of SXA103/SX103, confirm that this cleaner is compliant with local regulations*

Step 3:



Using the SUA4903 (Aerosol) Advanced Plastic Bond


Apply a light coat of SUA4903 (Aerosol) and allow 5 minutes dry time or until completely flashed to a matt finish prior to topcoat or sealing.

Aerosol Can Disposal



When material in can is spent, turn can upside down and depress the nozzle until all propellant is exhausted. Place empty can or cans that are no longer to be used into properly labeled metal containers. The waste containers should be managed as a hazardous waste pursuant to local, state, and federal regulations.

Application Chart

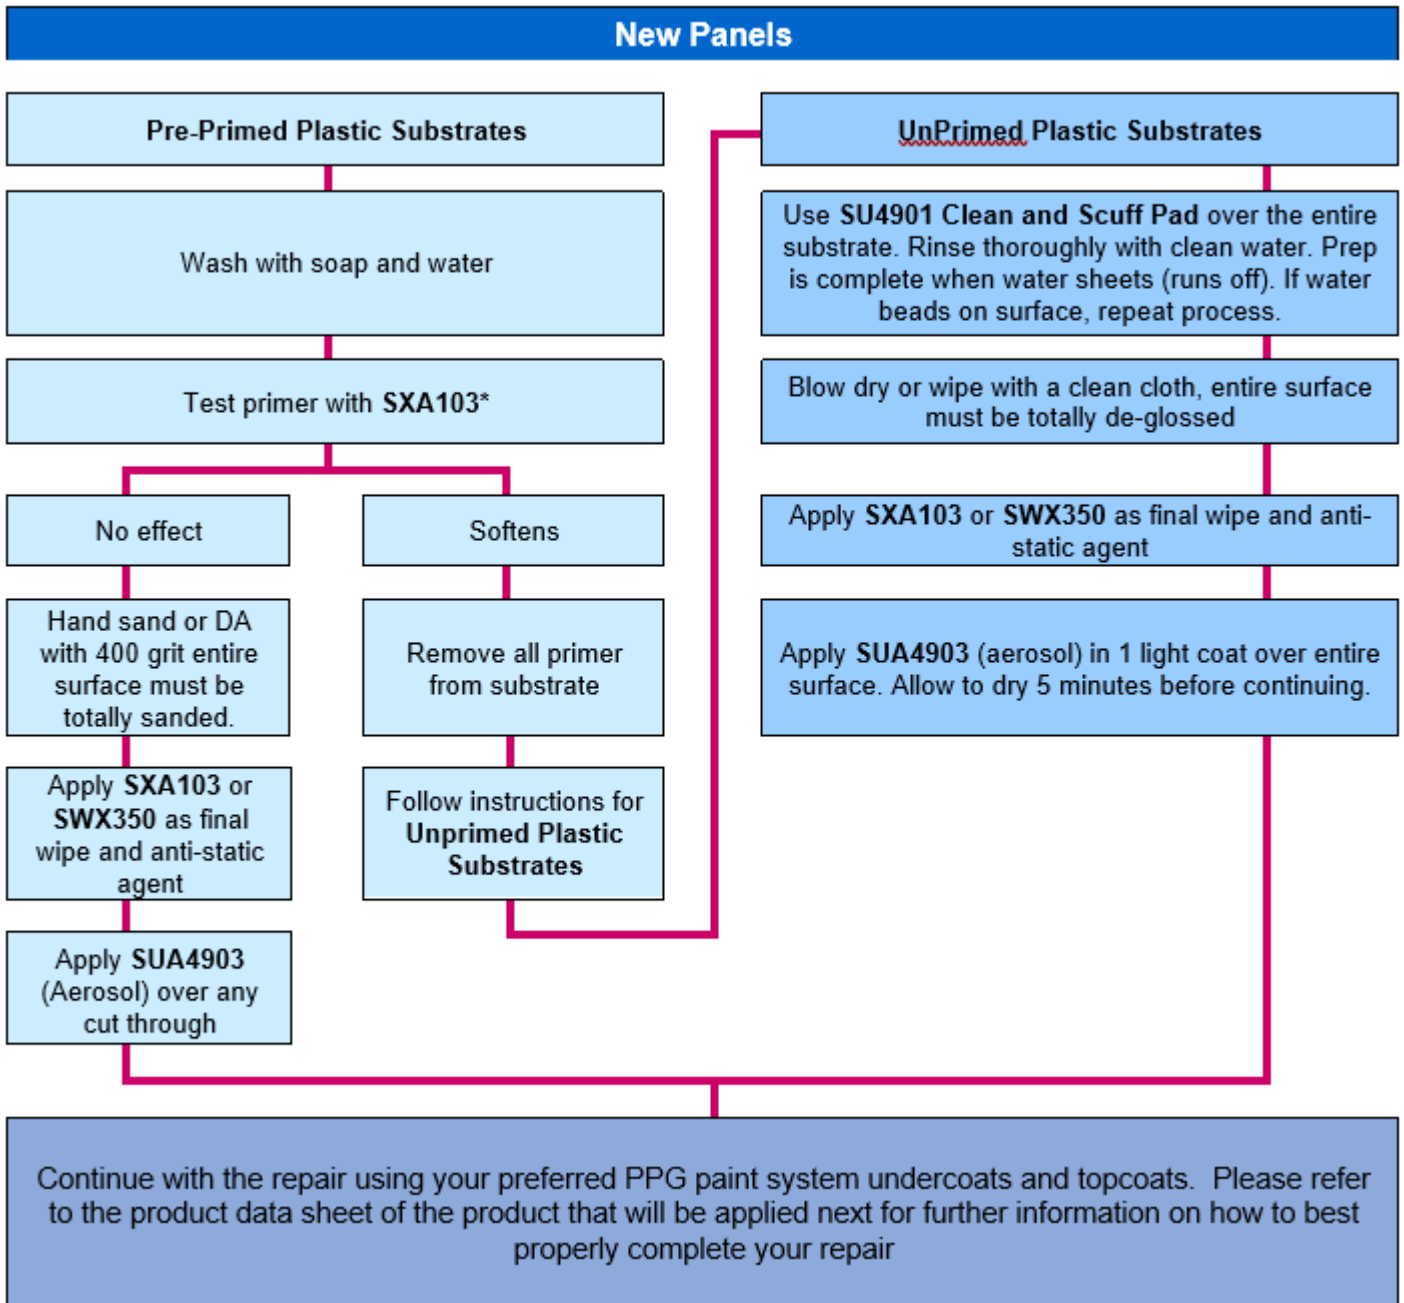

* Test the primer; Moisten a clean white cloth with SX103 or SXA103 *Multi-Prep* and rub an inconspicuous spot on the plastic. If the primer is softened or wipes off, remove all of the primer from the plastic part by sanding, then follow the bare plastic preparation process.

For additional information, refer to the appropriate topcoat system product bulletin.

Application Chart

Existing Plastic Panels

Complete any minor or major plastic repair

De-gloss entire surface with 400 grit

Use **SU4901 Clean and Scuff Pad** or **SWX350** to clean the raw plastic. Rinse thoroughly with clean water. Prep is complete when water sheets (runs off). If water beads on surface, repeat process.

Blow dry or wipe with a clean cloth, entire raw plastic surface must be totally de-glossed

Apply **SXA103** or **SWX350** as final wipe and anti-static agent

Apply **SUA4903** (aerosol) in 1 light coat over all exposed raw plastic.
Allow to dry 5 minutes before continuing.

Continue with the repair using your preferred PPG paint system undercoats and topcoats. Please refer to the product data sheet of the product that will be applied next for further information on how to best properly complete your repair

For additional information, refer to the appropriate topcoat system product bulletin.

Product	SU4901	SUA4903
Applicable Use Category	Substrate Cleaner	Adhesion Promoter (AEROSOL)
Description	CLEAN AND SCUFF SPONGE	ADVANCED PLASTIC-BOND (AEROSOL)
VOC ACTUAL lbs/gal	0.09 lbs/gal	5.81 lbs/gal
VOC ACTUAL g/L	10 g/L	696 g/L
VOC Regulatory lbs/gal	0.09 lbs/gal	5.81 lbs/gal
VOC Regulatory g/L	10 g/L	696 g/L
Density lbs/gal	8.32 lbs/gal	6.02 lbs/gal
Density g/L	997 g/L	721 g/L
Volatile Weight	97.4	96.4
Volatile Volume	97.4	97.9
Solids Weight	2.6	3.6
Solids Volume	2.6	2.1
% Water by Wt.	96.4	0
% Water by Vol.	96.3	0
Percent of Exempts by Weight	0	0
Percent of Exempts by Volume	0	0

Important: Before opening the packages, be sure you understand the warning messages on the labels of all components, since the mixture will have the hazards of all its parts. Improper spray technique may result in a hazardous condition. Follow spray equipment manufacturer's instructions to prevent personal injury or fire. Follow directions for respirator use. Wear eye and skin protection. Observe all applicable precautions.

See Safety Data Sheet and Labels for additional safety information and handling instructions.

EMERGENCY MEDICAL OR SPILL CONTROL INFORMATION (412) 434-4515; IN CANADA (514) 645-1320

Materials described are designed for application by professional, trained personnel using proper equipment and are not intended for sale to the public. Products mentioned may be hazardous and should only be used according to directions, while observing precautions and warning statements listed on label. Statements and methods described are based upon the best information and practices known to PPG Industries. Procedures for applications mentioned are suggestions only and are not to be construed as representations or warranties as to performance, results, or fitness for any intended use, nor does PPG Industries warrant freedom from patent infringement in the use of any formula or process set forth herein.



PPG
 19699 Progress Drive
 Strongsville, OH 44149

PPG Canada Inc.
 2301 Royal Windsor Drive Unit #6
 Mississauga, Ontario Canada L5J 1K5