# Environmental Product Declaration



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:





# **Sigmacryl Universal Matt**

Programme:

Programme operator:

EPD registration number:

Publication date:

Valid until:

The International EPD® System, www.environdec.com EPD International AB

S-P-07135

2023-06-09

2028-06-03

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com





### **General information**

**Programme information** 

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	<u>info@environdec.com</u>

Accountabilities for PCR, LCA and independent, third-party verification
Product Category Rules (PCR)
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product Category Rules (PCR): International EPD System, PCR for Construction Products, 2019:14, version 1.2.5.
PCR review was conducted by: Claudia A. Peña, Director of Sustainability at ADDERE Research and Technology

Life Cycle Assessme	nt (LCA)
	William Collinge, PPG Product Sustainability CoE
Third-party verification	on
Independent third-party  ✓ EPD verification by indiv	y verification of the declaration and data, according to ISO 14025:2006, via:
Third-party verifier:	Rui Wang, IVL Swedish Environmental Research Institute, rui.wang@ivl.se
Approved by: The Inter	rnational EPD <sup>®</sup> System
Procedure for follow-up	o of data during EPD validity involves third party verifier:
Yes	✓ No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.



# **Company Information**

Owner of the EPD: PPG Industries

<u>Contact:</u> Sarah Trowse (sarah.trowse@ppg.com)

Description of the organisation:

PPG is a global manufacturer of coatings who is the owner of many brands through-out Europe, one of these being Sigma Coatings.

### Product-related or management system-related certifications:

PPG's EHS Policy incorporates the elements of voluntary global industry initiatives, including Responsible Care<sup>®</sup> and Coatings Care<sup>®</sup>, which help companies manage safe and environmentally responsible practices in the chemicals and coatings industries. At more than 40 of its facilities, PPG has received ISO 14001:2004 certification.

### Name and location of production site(s):

Amsterdamseweg 14, 1422 AD Uithoorn, Netherlands

### **Product Information**

<u>Product name:</u> Sigmacryl Universal Matt <u>Product identification:</u> Products are identified by name

Product description: Sigmacryl Universal Matt is an aesthetic highly opaque matt wall and ceiling paint for

interior use.



UN CPC code: 35110

Geographical scope: European Union Countries

<u>Technical information:</u>

Density (kg/L)	1.41
Solid content by mass (%):	54.1
VOC content (g/L):	0.02
Coverage rate/coat (m <sup>2</sup> /L):	8.5
Number of coats:	2

# **LCA Information**

<u>Declared unit:</u> The declared unit for this EPD is 1 m<sup>2</sup> of substrate covered and

protected by Sigma Coatings Interior Wall Paints.


Reference service life: 10 years
Time representativeness: 2021-2022

<u>Database(s)</u> and <u>LCA</u> software used: Ecoinvent 3.8, Industry Data 2.0; Simapro v. 9.4.

Description of system boundaries:

The type of EPD is Cradle to Gate with Options (EPD Type b - Modules A1-A3, A4, A5, C1-C4, and D), with results shown being the highest results for any of the included products.

### System diagram:

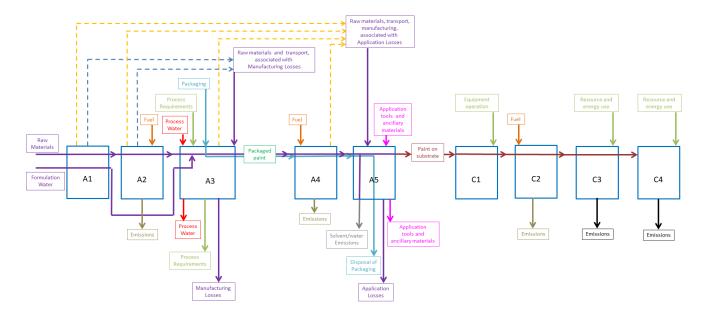

# **More Information**

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Pro	duct st	tage	Construction process stage		Use stage	Use stage End of life s			ge
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use, maintenance, repair, replacement, refurbishment, operational energy and water use	De-construction demolition	Transport	Waste processing	Disposal
Module	<b>A</b> 1	A2	A3	A4	A5	B1-B7	C1	C2	C3	C4
Modules declared	Х	Х	Х	X	Х	ND	Х	Х	Х	Χ
Geography	EU27	EU27	NL	EU27	EU27		EU27	EU27	EU27	EU27
Specific data used	16%	6 (Not	e 1)	-	-	-	-	-	-	-
Variation – products		0%		-	-	-	-	-	-	-
Variation – sites	Not	Applic	able	-	-	-	-	-	-	-

Resource recovery stage						
Reuse-Recovery- Recycling-potential						
D						
Х						
EU27						
-						
-						
-						

Note 1: Based on GWP-GHG of Stage A3 divided by GWP-GHG for stages A1-A3. Data for A3 is specific to PPG facilities, which means A3 accounts for 16% of A1-A3 in this reported EPD.

# **Content Information**

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight- % and kg C/kg
Additives	<0.02	-	-
Biocides	<0.001	•	-
Binders	0.03-0.07	-	-
Fillers	0.03-0.1	-	-
Glycols, esters, ethers	<0.001		-
Pigments	<0.001		-
Solvents	<0.001		-
TiO2	0.03-0.07		-
Water	0.13-0.17		-
Total	0.332	0.0	0% / 0.0

Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg
Steel for cans/buckets(Note 1)	9.80E-04	0.30%	0.0
Polypropylene for cans/buckets	9.88E-03	2.97%	0.0
Cardboard for boxes and pallet interleaves	4.28E-03	1.29%	0.5
Wood pallet	1.21E-02	3.66%	0.5
Polyethylene for pallet wrap	4.86E-04	0.15%	0.0
TOTAL	2.78E-02	8.37%	0.025

Note 1: Packaging weights are the maximum of the individual products included in the EPD. Packaging weight percentages are assessed on the maximum product weight per declared unit given above.

Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight-% per declared unit
None			

# **Assumptions beyond module A3**

### **A4**

Transportation distance is assumed to be 850 km according to EU geography and location of PPG factories. Transportation mode is assumed to be by Euro 5 16-32 metric ton truck.

### **A5**

The following sub modules and assumptions are included in A5

- 1. Application tools and ancilliaries: roller, tray and plastic sheeting.
- 2. Disposal of application waste: an estimate of 1% application lost is assumed. Environmental impact of manufacturing and disposal of 1% product lost is included in A5. Solid content of lost products are assumed to be disposed of as nonhazardous waste to incineration without energy recovery.
- 3. Primary packaging (steel, plastic and cardboards) are disposed as general waste. Pallet packaging is disposed as wood waste.
- 4. VOCs were modelled as direct emission to the environment and characterized by their characterization factors according to EVEA Method EN 15804 A2 EPD Ev-DEC 1.10 ei3.8 SP9.4.

### C1-C4

- 1. C1: Energy associated with demolition of the substrate structure is pro-rated for the mass of paint.
- 2. C2: Transportation to disposal is assumed to 30 km and transportation mode is assumed to be by Euro 5 16-32 metric ton truck.
- 3. C3: No waste processing options are considered.
- 4. C4: It is assumed that the paint will be disposed of along with the substrate in a landfill.

### D

No benefits and loads beyond the product system boundary were declared since no reuse or recovery occurs for architectural coatings in general. In addition, since landfilling is assumed to be the waste disposal option in C4 module, no "useful energy carrier" is considered leaving the product system. Therefore, no benefit is claimed in module D.

### Documentation for calculating the Reference Service Life (RSL)

An assumed reference service life of 10 years is declared, since the disposal phase is analysed. However, the reference service life does not affect the results, since use phase modules are not declared.

# **Environmental Information**

# Potential environmental impact – mandatory indicators according to EN 15804

Results per declared unit (1 m<sup>2</sup> of substrate covered and protected by Sigma coating)

Indicator	Unit	A1-A3	A4	A5	B1 - B7	C1	C2	C3	C4	D
GWP - fossil	kg CO <sub>2</sub> eq.	3.84E-01	5.07E-02	8.33E-02	ND	4.50E-05	8.93E-04	0.00E+00	2.14E-02	0.00E+00
GWP -biogenic	kg CO <sub>2</sub> eq.	-2.82E-02	2.03E-05	3.04E-02	ND	1.06E-08	3.57E-07	0.00E+00	7.48E-06	0.00E+00
GWP - Iuluc	kg CO <sub>2</sub> eq.	3.61E-04	1.99E-05	3.88E-05	ND	5.62E-09	3.51E-07	0.00E+00	1.93E-06	0.00E+00
GWP - total	kg CO <sub>2</sub> eq.	3.56E-01	5.07E-02	1.14E-01	ND	4.50E-05	8.94E-04	0.00E+00	2.14E-02	0.00E+00
ODP	kg CFC 11 eq.	4.18E-08	1.17E-08	2.89E-09	ND	9.58E-12	2.07E-10	0.00E+00	5.74E-10	0.00E+00
AP	mol H⁺ eq.	3.29E-03	2.06E-04	2.68E-04	ND	4.56E-07	3.62E-06	0.00E+00	1.60E-05	0.00E+00
EP - freshwater	kg P eq.	1.54E-05	3.55E-07	1.99E-06	ND	2.28E-10	6.26E-09	0.00E+00	3.03E-08	0.00E+00
EP - marine	kg N eq.	3.48E-04	6.13E-05	5.44E-05	ND	2.00E-07	1.08E-06	0.00E+00	5.43E-06	0.00E+00
EP-terrestrial	mol N eq.	3.62E-03	6.77E-04	5.00E-04	ND	2.19E-06	1.19E-05	0.00E+00	5.98E-05	0.00E+00
POCP	kg NMVOC eq.	1.39E-03	2.07E-04	2.00E-04	ND	6.04E-07	3.65E-06	0.00E+00	2.18E-05	0.00E+00
ADP - minerals & metals*	kg Sb eq.	4.28E-06	1.77E-07	3.05E-07	ND	3.32E-11	3.12E-09	0.00E+00	6.40E-09	0.00E+00
ADP - fossil*	MJ	6.82E+00	7.67E-01	1.66E+00	ND	6.14E-04	1.35E-02	0.00E+00	4.45E-02	0.00E+00
WDP*	m <sup>3</sup>	3.10E-01	2.30E-03	4.49E-02	ND	1.30E-06	4.04E-05	0.00E+00	1.93E-03	0.00E+00
GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation										

potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADPfossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted

# Potential environmental impact – additional mandatory and voluntary indicators

### Results per declared unit

Indicator	Unit	A1-A3	A4	A5	B1 - B7	C1	C2	C3	C4	D
GWP-GHG[1]	kg CO <sub>2</sub> eq.	3.86E-01	5.07E-02	8.36E-02	ND	4.50E-05	8.94E-04	0.00E+00	2.14E-02	0.00E+00
Particulate Matter	disease inc.	2.16E-08	4.36E-09	2.33E-09	ND	1.21E-11	7.69E-11	0.00E+00	3.18E-10	0.00E+00
Ionizing radiation, human health (IRP)	kBq U235 eq.	1.96E-02	3.33E-03	2.59E-03	ND	2.57E-06	5.86E-05	0.00E+00	1.75E-04	0.00E+00
Eco-toxicity - freshwater (ETP-fw)	CTUe	9.42E+00	5.98E-01	5.17E-01	ND	3.96E-04	1.05E-02	0.00E+00	3.58E-02	0.00E+00
Human toxicity, cancer effect (HTP-c)	CTUh	6.44E-10	1.94E-11	2.79E-11	ND	2.28E-14	3.41E-13	0.00E+00	2.54E-12	0.00E+00
Human toxicity, non-cancer effects (HTP-nc)	CTUh	1.29E-08	6.27E-10	5.16E-10	ND	2.92E-13	1.11E-11	0.00E+00	2.85E-11	0.00E+00
Land use related impacts/Soil quality (SQP)	dimensionless	4.43E+00	5.27E-01	2.29E-01	ND	8.23E-05	9.28E-03	0.00E+00	1.06E-01	0.00E+00

Additional voluntary indicators e.g. the voluntary indicators from EN 15804 or the global indicators according to ISO 21930:2017

Note 1: GWP-GHG is calculated as GWP - total minus any climate change impact (positive or negative) caused by biogenic carbon emission or uptake.

<sup>\*</sup> Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.



Use of	resources
Results pe	er declared unit

Indicator	Unit	A1-A3	A4	A5	B1 - B7	C1	C2	C3	C4	D
PERE	MJ	4.26E-01	1.08E-02	6.90E-02	ND	5.12E-06	1.90E-04	0.00E+00	7.98E-04	0.00E+00
PERM	MJ	3.06E-01	0.00E+00	3.09E-03	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	7.31E-01	1.08E-02	7.21E-02	ND	5.12E-06	1.90E-04	0.00E+00	7.98E-04	0.00E+00
PENRE	MJ	5.29E+00	7.66E-01	1.64E+00	ND	6.14E-04	1.35E-02	0.00E+00	4.45E-02	0.00E+00
PENRM	MJ	1.50E+00	0.00E+00	1.52E-02	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	6.79E+00	7.66E-01	1.65E+00	ND	6.14E-04	1.35E-02	0.00E+00	4.45E-02	0.00E+00
SM	kg	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	$m^3$	7.82E-03	8.39E-05	1.02E-03	ND	4.37E-08	1.48E-06	0.00E+00	4.66E-05	0.00E+00

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials;
PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary
energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy
resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials;
PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of
renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

V	٨	ast	6	nr	ho	ш	cti	on
v	v	ası		$\mathbf{p}_{\mathbf{l}}$	UU	u	υu	VI I

### Results per declared unit

Indicator	Unit	A1-A3	<b>A</b> 4	A5	B1 - B7	C1	C2	C3	C4	D
Hazardous waste disposed	kg	6.01E-02	5.54E-04	2.64E-03	ND	8.16E-07	9.77E-06	0.00E+00	6.13E-05	0.00E+00
Non-hazardous waste disposed	kg	1.75E+00	4.38E-02	5.23E-02	ND	3.81E-06	7.72E-04	0.00E+00	1.80E-01	0.00E+00
Radioactive waste disposed	kg	2.22E-05	5.18E-06	2.42E-06	ND	4.11E-09	9.13E-08	0.00E+00	2.66E-07	0.00E+00

### **Output flows**

### Results per declared unit

Indicator	Unit	A1-A3	A4	A5	B1 - B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	0.00E+00	0.00E+00	1.03E-02	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, electricity	MJ	0.00E+00	0.00E+00	7.84E-02	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, thermal	MJ	0.00E+00	0.00E+00	1.62E-01	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



# Other Environmental Performance Indicators

None included

### **Additional Environmental Information**

None included

### **Additional Social and Economic Information**

None included

# Information Related to Sector EPD

Not applicable

# **Differences Versus Previous Versions**

Not applicable

### References

General Programme Instructions of the International EPD System®, Version 4.0

EPD International Product Category Rules (PCR) for Construction Products, PCR 2019:14, Version 1.2.5

Life-Cycle Analysis Background Report Prepared for Environmental Product Declarations of EPD International for Sigma Coatings Interior Wall Paints, PPG Product Sustainability CoE, 440 College Park Drive Monroeville, PA 15146 USA, Date of Report April 14, 2023

ISO 14044:2006-10, Environmental Management — Life Cycle Assessment — Requirements and Instructions (ISO 14044:2006); EN ISO 14044:2006

EN 15804+A2:2019, Sustainability of construction works — Environmental Product Declarations — Core rules for the construction products product category